

IST UV UNITS FOR KBA-METALPRINT MAILÄNDER

It is important to maximise the production possibilities that new automation provides. IST UV solutions are designed with optimum reliability as a priority and this is achieved by incorporating outstanding heat management possibilities and total production flexibility.

THE UV PACKAGE FOR THE KBA-MAILÄNDER PRESS


URS® INLAY REFLECTOR TECHNOLOGY

URS® reflectors are what are known as cold mirror reflectors, fitted with more than 60 different metal oxide layers that only reflect the UV light and deflect the thermal radiation to a water-cooled profile. These highly resistant reflectors boast an extremely long service life and optimum heat management.

The reflector inlays are force-fitted to the unit, facilitating an easy replacement of the half shells. For example, simple replacement of the reflectors is interesting if the curing result can be improved by a different reflector geometry or coating for specific printing jobs.

FLC® QUICK-CHANGE LAMPS

The cordless FLC® UV lamp system enables lamps to be changed quickly and easily. It is possible to remove the UV lamp from the lamp unit with just one hand movement and a lamp replacement just takes a few seconds, thus saving users several hours of machine availability per year.

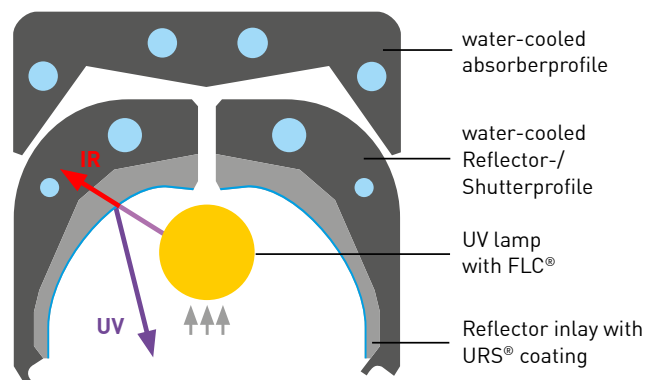

URS® Reflector technology

COOLING SYSTEM

Water-cooling of the shutters/reflectors ensures that excess heat is efficiently carried out of the press. Also, the integrated air-cooling provides for optimized output of the UV lamp as well as removing small traces of ozone.

STEPLESS POWER CONTROL OF UV LAMP OUTPUT

In relation to the speed of the press, the SLC-control can vary the lamp output infinitely between 40 and 100%. In stand-by operation, the UV lamp output is reduced automatically and can remain in stand-by mode indefinitely.

FLEXIBLE INTERCHANGE OF UV INTERDECK UNITS

When required, the UV interdeck units can be moved to different positions. A mechanical preparation of the respective printing station ensures easy movability.

OPERATOR FRIENDLY CONTROL SYSTEM UCS

Complete operation of the UV unit is managed by the UCS control terminal, which is installed adjacent to the control desk of the press.

UV INTERDECK CURING

- UV-unit mounted over sheet transport system
- Plug-in power connections on the drive side

ALSO IN OUR PROGRAMME


- UV Set-Stack units
- UV Undercure units
- UV Pre-Coater



IST UV interdeck curing



Typical Set-Stack Unit

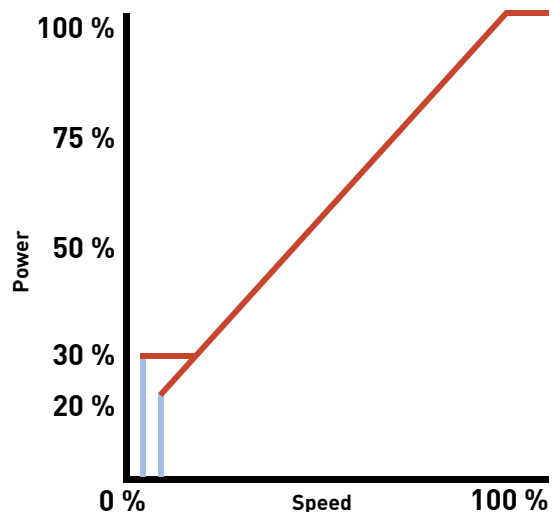

Electrical lamp control (ELC[®]) for highest demands and best energy savings in UV printing

WE HAVE THE CURE

IST METZ GmbH & Co. KG
Lauterstraße 14-18 | 72622 Nürtingen | Germany
Tel.: +49 7022 6002-0 | Fax: +49 7022 6002-76
E-Mail: info@ist-uv.com

IST France Sarl | info@fr.ist-uv.com
IST (UK) Limited | info@uk.ist-uv.com
IST America - U.S. Operations, Inc. | info@usa.ist-uv.com
IST Italia S.r.l. | info@it.ist-uv.com
IST Benelux B.V. | info@bnl.ist-uv.com

IST METZ UV Equipment China Ltd. Co. | info@cn.ist-uv.com
UV-IST Ibérica SLU | info@es.ist-uv.com
IST Nordic AB | info@se.ist-uv.com
IST METZ SEA Co., Ltd. | info@th.ist-uv.com